

Blackbutt

EUCALYPTUS PILULARIS



QUALITY KILN DRIED TIMBER

Blackbutt

Introduction


Blackbutt is a species that grows in abundance in the coastal forests in New South Wales and southern Queensland. The common name is derived from the distinctive black, charcoal look that is only on the base of the trunk. The timber is renowned for both its strength and versatility of application. Blackbutt is a straight grained timber, with a warm nutty hue which will compliment a range of interior designs where a lighter neutral palette is required.

Species in Detail

| | |
|----------------------------|---|
| Common Names | Blackbutt, Coastal Blackbutt |
| Look & Features | Exhibits pinholes, dark gum veins and some surface checking |
| Botanical Name | Eucalyptus Pilularis |
| Colour | colour fairly even from a light honey through to golden nutty browns - sapwood is distinctively paler |
| Dry Density | 900kg/m ³ |
| Natural Durability | Class 1 (above ground) |

Species Hardness Ratings

Species hardness is measured in Janka numbers - the higher the harder the species

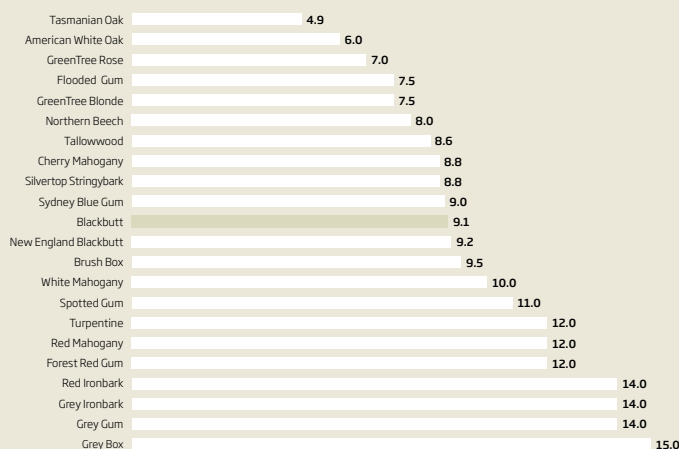

Product Matrix

| Product | Widths | Thickness | Install Method | Plywood | Particleboard | Battens | Bearers & Joist |
|-----------------------------|--------------|------------|--------------------------------|---------|---------------|---------|-----------------|
| Ultra10 | 86mm | 10mm | Full Trowel Glue & Secret Nail | ✓ | ✓ | | |
| Overlay | 83mm | 12mm, 14mm | Full Trowel Glue & Secret Nail | ✓ | ✓ | | |
| FOURTEEN | 130mm, 180mm | 14mm | Full Trowel Glue & Secret Nail | ✓ | ✓ | | |
| Traditional Flooring | 80mm, 130mm | 19mm | Secret Nail or Top Nail* | ✓ | ✓ | ✓ | ✓ |
| Wideboard Flooring | 180mm, 210mm | 21mm, 23mm | Top Nail | ✓ | ✓ | ✓ | ✓ |

*Boards wider than 80mm in traditional flooring should be top nailed as per AS1684.

Grade Descriptions

Select Grade: The Features that are present in Select grade flooring are relatively small and few in number, and although they are visible the features do not dominate the appearance of the floor.

Standard Grade (Medium Feature): Flooring in this grade will be moderately featured. Gum veins, gum pockets, insect trails, burls and borer holes, are some of the characteristic's that will be more prevalent in Standard Grade.

Feature Grade (High Feature): Feature grade flooring is heavily peppered with natural features particularly large gum veins.

Rustic Grade: A full featured floor to provide an old world charm. It may contain features that are more prominent than Feature Grade but with the structural integrity of a Feature Grade Floor.




Environmental Credentials

Hurford Hardwood is committed to our forests, our community and our future.

Underpinning our commitment is an ambitious hardwood reforestation project in our local surrounding area where we have purchase over 5000 hectares of land and have commenced a planting program that will see more than 25000 new plantation eucalypt saplings established each year.

Hurford Hardwood source a proportion of timber from private native forests with the balance procured from NSW State Forestry which is certified under the Australian Forestry Standards Chain of Custody. (AS4707 – 2006).

Hurford Hardwood insist that all timber produced from these forests is done so under the principles of Ecologically Sustainable Forest Management, a system developed to sustain the full range of commercial and conservation values of the natural forest diversity within ecological limits, for current and future generations.



QUALITY KILN DRIED TIMBER

Postal Address: P.O. Box 6366,
South Lismore NSW 2480, Australia
Phone: +61(2) 6621 9886
Fax: +61(2) 6621 7680
Email: hardwood@hurfords.com.au
Website: www.hurford.com.au