BJ's TIMBER FLOORING

ALLURE OAK

12 Burgay Court
Osborne Park WA 6017
08 9204 2611
admin@bjtf.com.au
www.bjtf.com.au

Technical Data Sheet

Allure Engineered Oak

The ALLURE Oak range is crafted with a Birch Plywood core material and a European Oak 4mm top layer. Lightly brushed with a Matt finish available in twelve different colours.

Specifications

- Species: European Oak
- Core Material: Birch Plywood
- Grade: ABC
- Surface: Brushed
- Coating: UV Lacquer (9)
- Gloss Level: Matt - 10%
- Profile: Tongue & Groove
- Edge Profile: Micro Bevel
- Wear Layer: 4mm (nominal)
- Width: 220mm
- Thickness: 15mm
- Length: 2200mm* 75% Full / 25% Short
- Glue: E0 glue
- Pack Size: 2.42m2 / box
- Installation: Direct Stick
- Sub-floors: Concrete / Plywood
- Hardness : 5.5 (kN) Janka

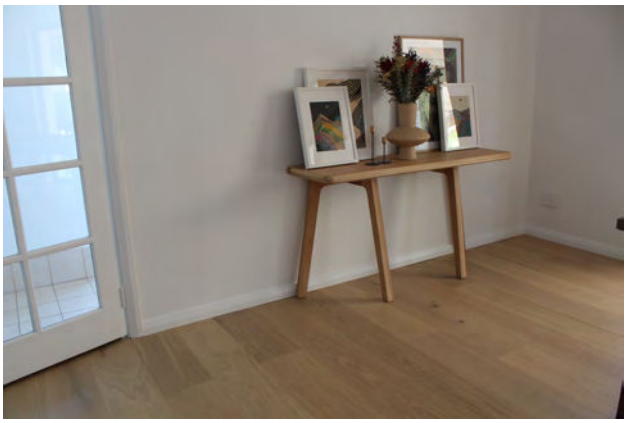

Colours Available

Ashen, Greige, Iceberg, Limewash White, Linen, Loam, Natural, Pebble Grey, Sandstone, Storm, Walnut & Whiskey. Also Available in Unfinished RAW & Herringbone

Certifications

- **FSC**
- **Slip Resistance: P3** - AS4586:2013
- **Fire Rating:** CHF Value - 3.8 kW/m² *(mean) AS ISO 9239.1:2003* - Smoke Value - 13 %.min *(mean)*
- **Heated Slabs:** Maximum 27C * *Conditions apply*

Warranty*

- 15 Year Residential / Commercial Structural Integrity*
  *Conditions apply (see Warranty)

atfa Australasian Timber Flooring Association
MEMBER www.atfa.com.au

1964 – 2026 62 YEARS IN TIMBER FLOORING