

Technical Data Sheet

Allure Engineered Oak Parquetry


The ALLURE Oak range is crafted with a Birch Plywood core material and a European Oak 4mm top layer. available in Raw Unfinished or Lightly brushed with a Matt finish available in twelve different colours.

Specifications

- Species: European Oak
- Core Material: Birch Plywood
- Formats: Herringbone or Chevron
- Grade: AB Raw / ABC Prefinished
- Surface: Smooth or Brushed
- Coating: RAW or UV Lacquer (9)
- Gloss Level: Matt - 10%
- Profile: Tongue & Groove
- Edge Profile: Square RAW / Micro Bevel Prefinished
- Wear Layer: 4mm (nominal)
- Width: 125mm
- Thickness: 15mm
- Length: 600mm
- Glue: E0
- Pack Size: 1.2m² / box
- Installation: Direct Stick
- Sub-floors: Concrete / Plywood
- Hardness : 5.5 (kN) Janka

Colours Available

Ashen, Greige, Iceberg, Limewash White, Linen, Loam, Natural, Pebble Grey, Sandstone, Storm, Walnut & Whiskey. Also Available in Unfinished RAW

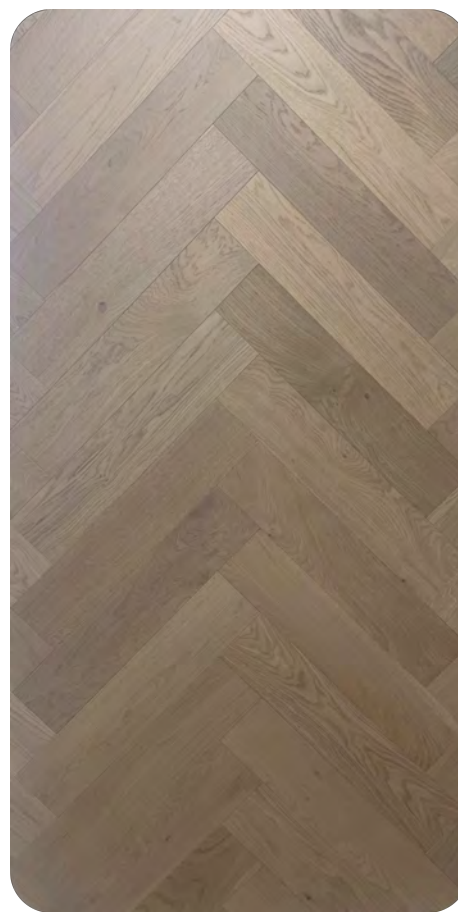

Certifications

- FSC
- Slip Resistance: P3 - AS4586:2013
- Fire Rating: CHF Value - 3.8 kW/m² (mean) AS ISO 9239.1:2003 - Smoke Value - 13 %.min (mean)
- Heated Slabs: Maximum 27C * Conditions apply

Warranty*

- 15 Year Residential / Commercial Structural Integrity*
- *Conditions apply (see Warranty)